



Red Series

Medium density foam and a tough red coating yields a strong resistance to wear yet remains flexible. The 1A, 1C, and 1E may be used in pipelines with minor cross sectional diameter reductions or restrictions. (Please consult Knapp or a qualified representative before applying a 1B, 1D, or 4A where line reductions are present.)


**Red Plain Spiral
(RPS)
Style 1, Type A**

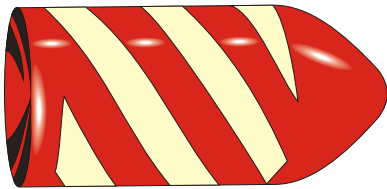


**Red Spiral,
Silicone Carbide
(RSSC)
Style 1, Type B**

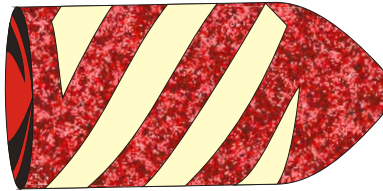

**Red Criss Cross
(RCC)
Style 1, Type C**

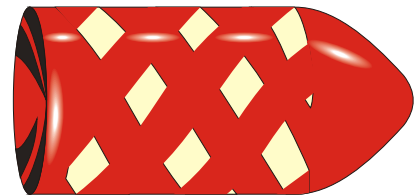


**Red Bare Squeegee
(RBS)
Style 5, Type A
(5 lb/ft³ density foam)**

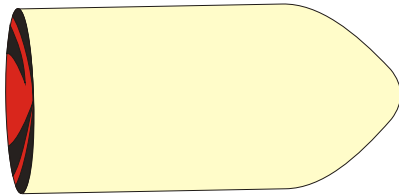


**Red Criss Cross
Totally Coated
(RCC-TC)
Style 1, Type C-TC**




**Red Criss Cross,
Silicone Carbide
(RCC-SC)
Style 1, Type D**

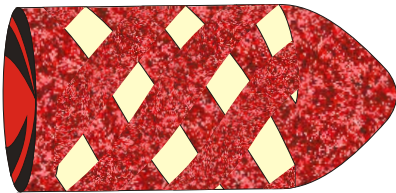

**Red Multi-Dimensional
(RMD)
Style 1, Type E**

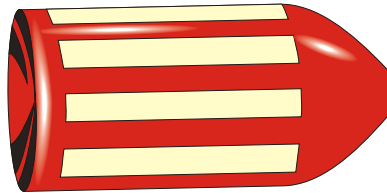

**Red Criss Cross,
Wire Brush
(RCC-WB)
Style 4, Type A**

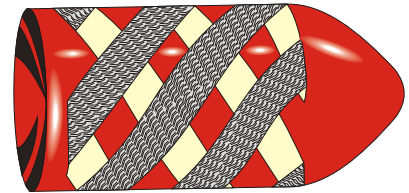

KNAPPTM
POLLY PIG

e-mail: knapp@pollypig.com
www.pollypig.com

1209 Hardy Street
Houston, TX 77020
Tel: 800/231-7205
713/222-0146
Fax: 713/222-7403